


DCI-10R Remote Paging Station

The DCI-10R Remote Paging Microphone works together with the DCI-10P Paging Selector. It is easily operated by pressing the zone selector buttons on the panel to activate the corresponding zone of the DCI-10P to achieve remote paging to every zone. The DCI-10R can control up to 16 DCI-10Ps separately. It has a built-in chime with mute.




Front Panel

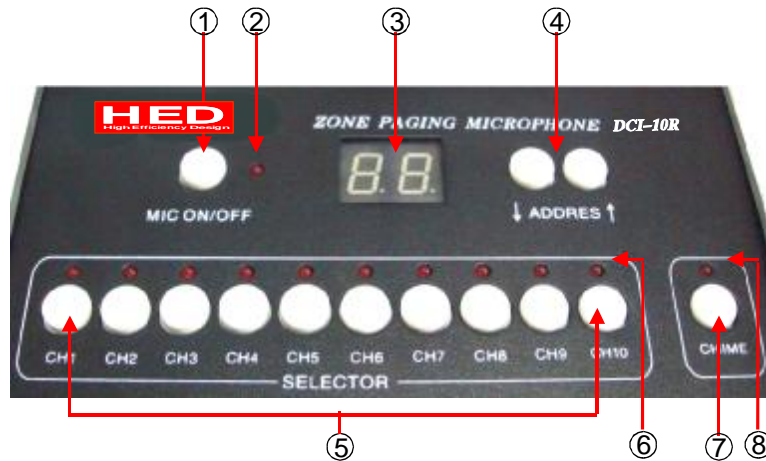


- | | | |
|-------------------|--------------------|-------------------|
| ① MIC Switch | ④ Address Selector | ⑦ Chime Button |
| ② MIC Indicator | ⑤ Zone Selectors | ⑧ Chime Indicator |
| ③ Address Display | ⑥ Zone Indicators | |

Rear Panel

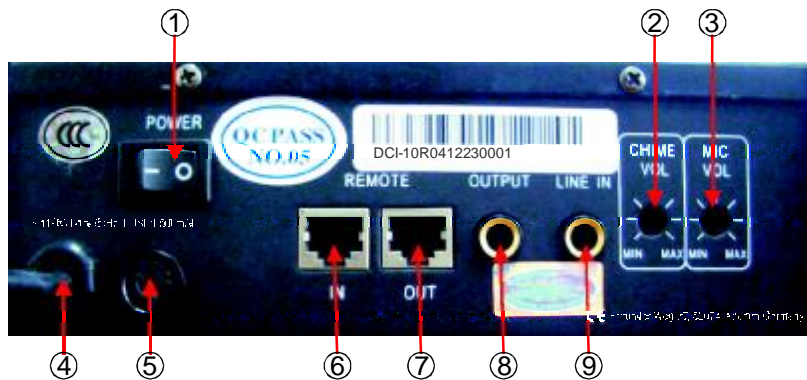

- | | | |
|----------------|------------------|-------------------|
| ① Power Switch | ④ Power Cord | ⑦ Remote Link Out |
| ② Chime Volume | ⑤ Fuse | ⑧ Audio Out |
| ③ MIC Volume | ⑥ Remote Link In | ⑨ Line In |

Connecting to the DCI-10R Remote Paging Station

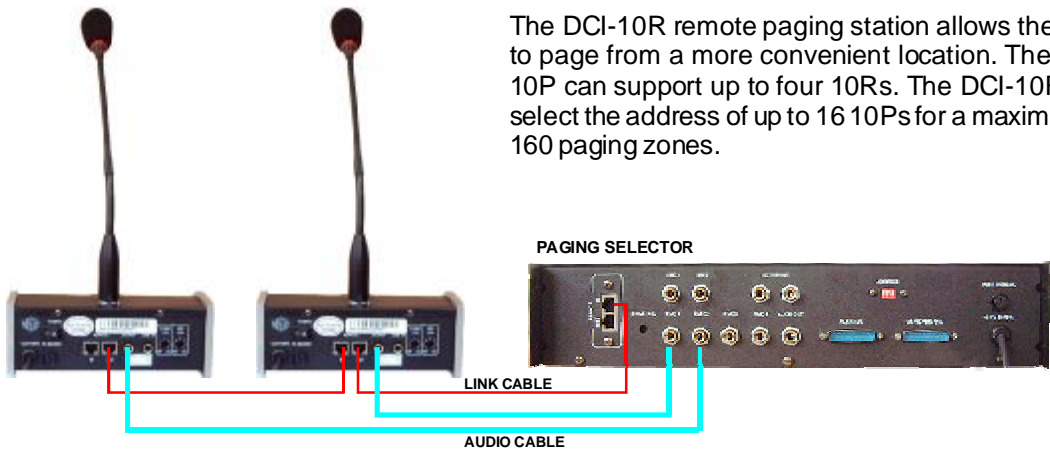


The DCI-10R remote paging station allows the user to page from a more convenient location. The DCI-10P can support up to four 10Rs. The DCI-10R can select the address of up to 16 10Ps for a maximum of 160 paging zones.

Please note that two connections are required between the 10R and 10P. The remote link cable is a standard RJ-45 type commonly used for computer networks. The cable supplied with the unit is for test purposes only. The audio cable required is standard shielded-type 1/4" phone plugs. The length can be up to 200 meters.


Address Selector Switch

Up to 16 DCI-10Ps can be linked together by using the rear panel ADDRESS dip switch. Please refer to the configuration chart to set the address of all the 10Ps in the system.

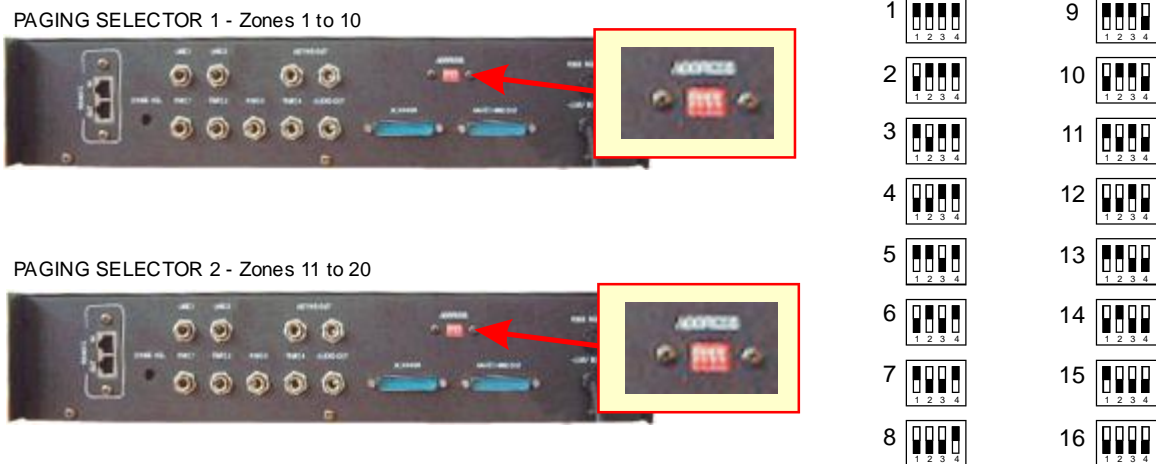


Selecting the Address

The DCI-10R can select from any of the 16 DCI-10Ps by using the ADDRESS selector. When the unit is first turned on, it will select ADDRESS 1. To select ADDRESS 2, simply press the up arrow button. To return to ADDRESS 1, press the down arrow button.

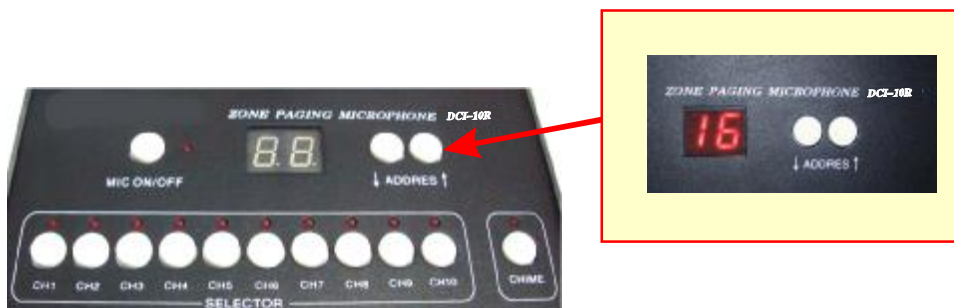


Selecting the Paging Zones

The DCI-10R can select any of the ten paging zones by pressing the zone selector buttons. To select all zones, simply press all zone buttons. Selecting a zone with the DCI-10R will cause the zone indicator on the DCI-10P to light. Please use this method to confirm that 10R is properly connected to the 10P.

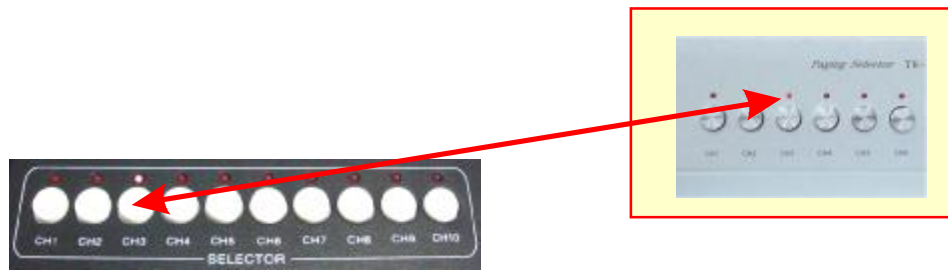

Connections Overview

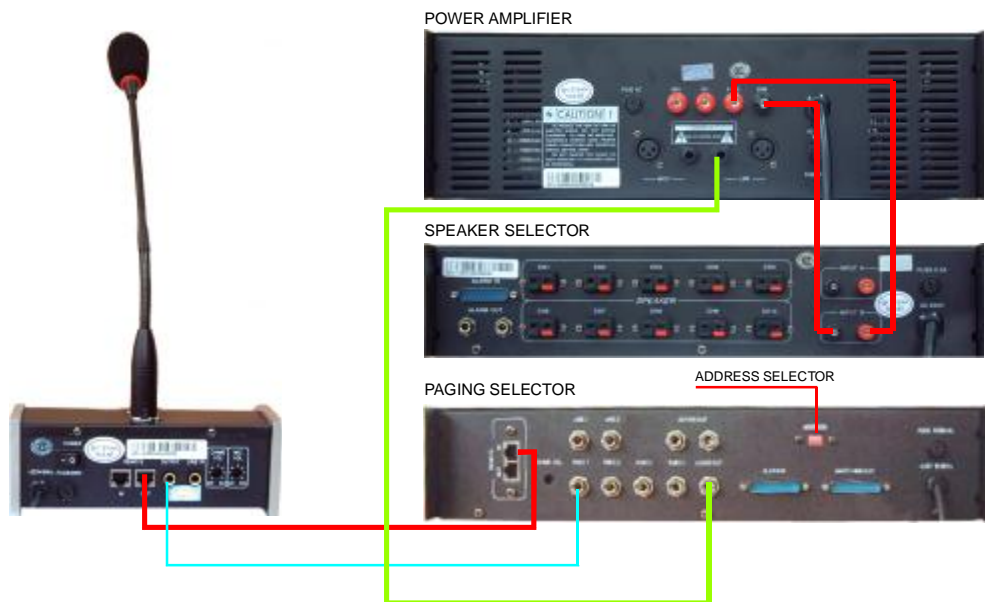

Specifications

Input	MIC: 600 ohms, <5mV, unbalanced LINE: 10K ohms, 200mV, unbalanced
Audio Output	0dBV
Frequency Response	MIC: 100Hz~10kHz; LINE: 20Hz~15kHz
S/N Ratio	>70dB
Protection	AC FUSE (0.5A) X 1
Power Requirements	AC 110/120 V \pm 10% / 50~60Hz <10VA
Dimensions (WxDxH)	80 mm X 205 mm X 75 mm
Net Weight	2.1 kg
Gross Weight	2.7 kg



Freunder Weg 90, 52074 Aachen,
Germany