




## 6010A LOUDSPEAKER SPECIFICATION

Maximum sound pressure level <sup>1)</sup>	93 dB
Free field frequency response	74 Hz – 18 kHz (± 2.5 dB)
Drivers	Bass 76 mm (3") cone, Treble 19 mm (3/4") metal dome with DCW™
Amplifier power	Bass 12 W + Treble 12 W
Signal input connector	RCA
Weight	1.4 kg (3.1 lb)
Dimensions (H x W x D)	195 mm (7 11/16") x 121 mm (4 3/4") x 114 mm (4 1/2")
Controls	Input Sensitivity, Bass Tilt, Desktop
Enclosure material and finish	Genelec MDE™ die cast aluminium enclosure available in Black, White or Silver finish


1) Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz @ 1 meter



## 5040A SUBWOOFER SPECIFICATION

Maximum sound pressure level in half space <sup>2)</sup>	98 dB
Free field frequency response (± 3 dB)	Main 35 Hz - 85 Hz LFE 35 Hz - 120 Hz
Driver	165 mm (6 1/2") cone, magnetically shielded
Amplifier power	40 W
Signal input connectors	6 x RCA (L, C, R, LR, RR, LFE), 1 x 3.5 mm stereo jack
Signal output connectors	5 x RCA (L, C, R, LR, RR)
Weight	6.3 kg (13.9 lb)
Dimensions (Height x Diameter)	251 mm (9 7/8") x 305 mm (12")
Controls	Remote Volume Control, Input Sensitivity, Bass Roll-Off, Phase
Enclosure material and finish	Deep drawn steel and die cast aluminium available in Black, White or Silver finish

2) Maximum short term sine wave SPL output averaged from 40 to 85 Hz, measured in half space at 1 meter

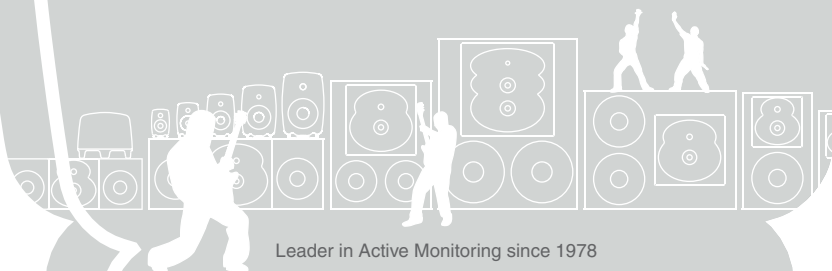

Leader in Active Monitoring since 1978

[www.genelec.com](http://www.genelec.com)



# GENELEC®

6010A Active Loudspeaker  
5040A Active Subwoofer



## The First Step to Professional Audio

The Genelec 6010A is a very compact active loudspeaker optimized for close proximity listening applications. Its small size, amazing sound quality and rugged construction make it an ideal sound system for the traveling professional user and a constant source of listening enjoyment. Designed as an active loudspeaker, the 6010A contains power amplifiers, active crossover

filters and automatic protection circuitry. No external amplifiers are needed. RCA audio connectors provide direct connection to a computer sound card, portable MP3 player or preamplifier.

The Genelec 5040A active subwoofer is designed to complement up to five 6010A's with accurate and dynamic bass response reaching down to 35 Hz. The subwoofer conveniently features a remote volume control allowing adjustment of the entire sound system as well as versatile acoustic controls for perfect room integration.

The 6010A and 5040A bring Genelec's renowned audio expertise into a new size category, ready for a multitude of modern life applications, with professional performance and outstanding quality.

>> Visit [www.genelec.com/firststep](http://www.genelec.com/firststep) for more information <<

