


ATTENUATORS

AV-4 / AV-40 / AV-100

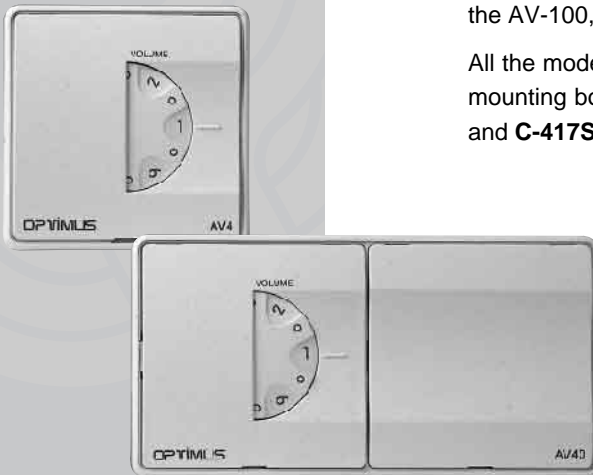


100 V Line attenuators. Built-in security paging system that allows the messages go through at full power, no matter the position of the volume control. The 3 different power handling capacities, 6 W in the AV-4, 40 W in the AV-40 and 100 W in the AV-100, allow to cover any specific power requirement.

All the models include the embedding plastic box. The surface mounting boxes are available under request (**C-417S** for AV-4 and **C-417S2** for the AV-40 and AV-100).

	AV-4	AV-40	AV-100
Input		100 V line	
Output		100 V line	
Regulated power	Up to 6 W	Up to 40 W	Up to 100 W
Dimensions (mm)	78 x 78 x 50 (depth)	150 x 78 x 50 (depth)	150 x 78 x 50 (depth)
Flush-mounting box	Included, model L-170E. 60 x 60 x 42 mm	Included, model C-417RR. 135 x 60 x 42 mm	
Weight	0.09 kg	0.360 kg	0.650 kg
Volume control		Regulated by steps (9)	
Security paging		+, S, -C switching line	
Input programs		1	
Finishing		White ABS	
Remarks	Surface mounting box, optional, model C-417S	Surface mounting box, optional, model C-417S2	

BLOCK DIAGRAM

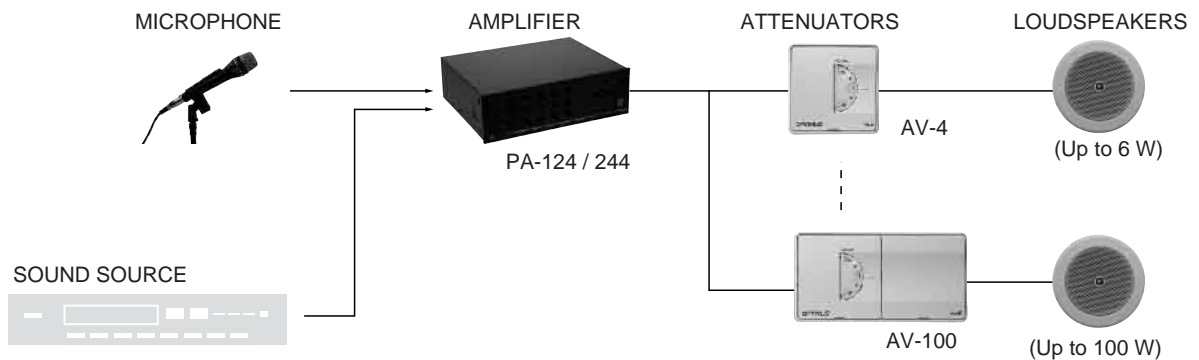

ATTENUATORS

