

SLB-240-AB/EN5424 240-MM-A/B-CEILING-LOUDSPEAKER



S
L
B

240
A/B

EN
5424

240
MM

A / B

- ONLY **240-MM-EXTERNAL-DIAMETER** ON TWO OVAL 165-MM-SYSTEMS
- 108-MM-MOUNTING-DEPTH WITH FIRE-DOME
- **TWO AUTONOMOUS** LOUDSPEAKER & 100-VOLT-TRANSFORMER PER SYSTEM
- ENABLE OPERATION OF SPEAKER VIA **TWO DISCRETE CABLE-LINES**
- **50-HZ-STABLE** 100-V-TRANSFORMER
- IDENTICAL **HIGH LOUDSPEAKER QUALITY** AS **WLA-230-AB**
- OPTIONAL CERAMIC-CLAMP & THERMO-FUSE AVAILABLE

- **SLB-240-AB/EN-5424 WITH FIRE-DOME CERTIFICATES VERSIONS:
ORDER-NUMBERS:**


SLB-240-AB/EN-5424

CPD-NR: 1293-CPD-0368

TECHNICAL DATA:

SLB-240-AB/EN5424

Loudspeaker:	2 x 15W 165 x 70-mm-Fullrange
Power-Consumption:	2 x 100V-6-3-1,5W
Frequency-Range:	120-20 000 Hz
EN-Sensitivity 1W/4M:	73 dB (single) / 79 dB (double)
SPL max EN-5424 6W/4M:	81 dB (single) / 87 dB (double)
SPL 1W/1M max. EASE/Ulysses:	99 dB (1,8 KHz)
SPL 6W/1M max. EASE/Ulysses:	106 dB (1,8 KHz)
Radiation H (0,5/1/2/4KHz):	180°/180°/132°/71° (single)
Radiation V (0,5/1/2/4KHz):	180°/180°/132°/71° (single)
Dimensions:	240 x 108-MM
Ceiling-Cutout:	220 mm
Weight:	1,9 Kg with STANDARD-FT
Material:	Metal
Colour:	RAL 9010

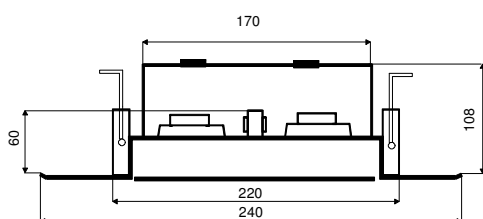

EN-5424-PAGE-34

S
Y
S
T
E
M

L
I
N
E

S
P
E
A
K
E
R