

A934-002R-120

TWO PORT POWER RELAY MOTORIZED SCREEN CONTROL MODULE



DESCRIPTION

The ABtUS A934-002R-120 is a two power relay control module that can be used to avoid all cumbersome issue of the power cabling during integration. It is versatile and can be placed anywhere within the room and is the most simple and efficient power controller for any electrical powered device. [example: Motorized (screen, projector lifter, drape or curtain)]

Replacement of conventional 1 to 1 control setup to many or 1 to many controlling as well as grouping are now made possible.

FEATURES

- Max Relay Load Rating 16A@240V
- With standard RS-485 communication protocol, compatible with any central control for all host (standard J1708 BUS)
- With I/O connectivity for integration with any existing standard wall switch

TECHNICAL SPECIFICATION

AC VOLTAGE RANGE: AC 100 ~ 240V

COM PORT: RS-485

I/O CONNECTIVITY: Dry Contact Control x 01

NUMBER OF ID: 32


RELAY LOAD RATING: Max 16A@240V

POWER SUPPLY: 12 V DC 500mA

HOUSING: Aluminum Enclosure

DIMENSIONS: 92 x 58 x 33 mm

WEIGHT: 173.2 g

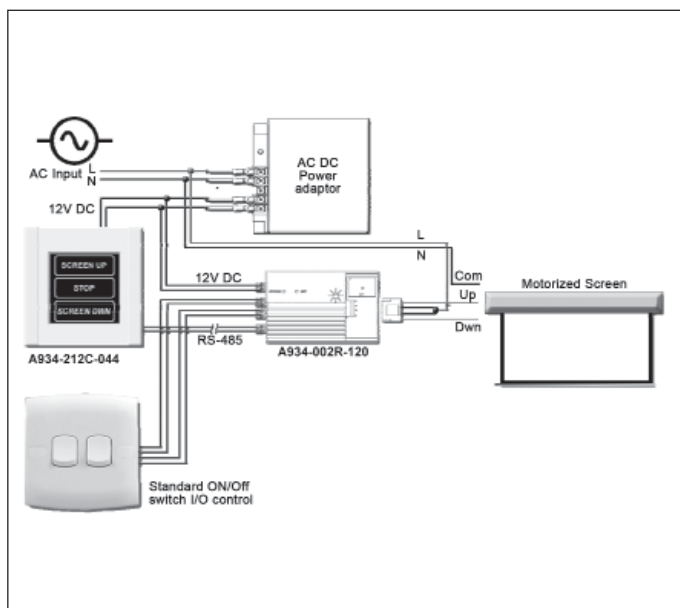

TYPICAL APPLICATIONS

Any professional control system requiring controls of motorized screens, curtains or gates.

- Schools (Media Classrooms) • Churches • Corporate Applications (Meeting Rooms)
- Home Automation • Home Theaters • Hotels In Room Control

* Specifications are subject to change without notice.